

ASM


SINGLE PHASE VERSION

TECHNICAL SPECIFICATIONS




- Category** CENTRIFUGAL-PUMP with immersed vertical axis.
- Windings** Single-phase motor with Class F winding.
- Motor body** Extruded aluminium casing.
- Protection** IP 54 ingress protection rating.
- Safety** Built-in thermal motor protection system.
- Ball bearings** NSK and SKF (long-life) self-lubricant bearings or equivalent, in semi-rigid noise-damping housings.
- Motor shaft** AISI 303 stainless steel shaft.
- Connections** Motor power cord 1.100 mm long without plug.
- Immersion** Motor-driven pump with immersed vertical axis without clamping devices.
- Optional** Upon request the pumps can be assembled with fastening parts in stainless steel or anti-oxidant materials (see picture no. 2).
- Power supply** Voltages and frequencies according to customer's specific requirements can be supplied.
- Note** **PATENTED device.** Read the instruction booklet for correct set up and use. Designed for industrial use with CE certified tool machinery only. Not intended for food contact.

WITH STAINLESS STEEL
(OPTIONAL)

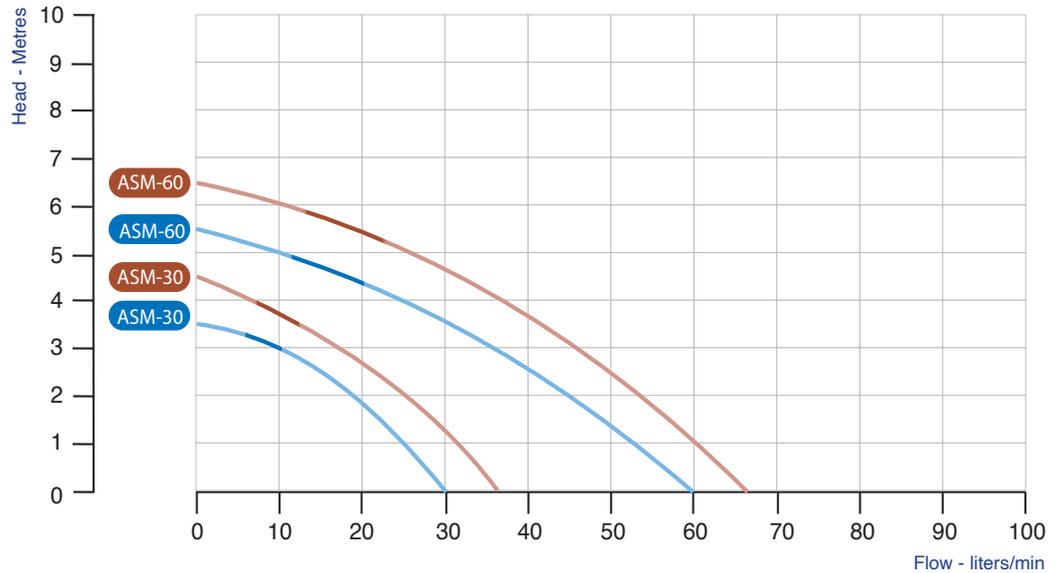

ACCESSORIES:

Pipe Fitting 3/8" & 1/2"

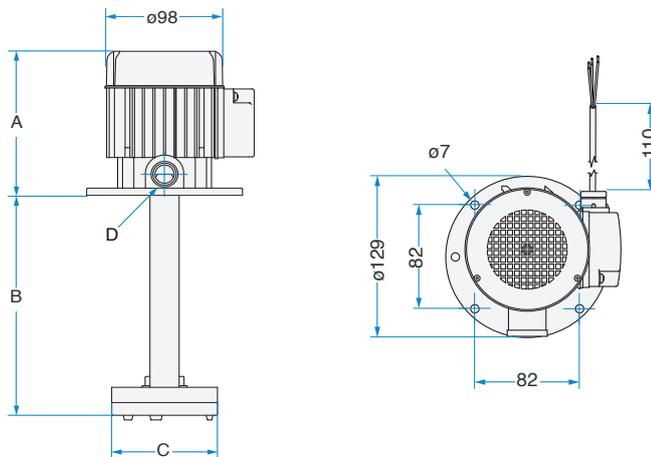

TYPE	Volt	Hz	Amp	KWatt (N)	Hp	RPM	A	B	C	D Ø OUT	Weight [Kg]
ASM-30	220-240	50-60	0,28-0,33	0,075	0,10	2800-3350	125	85/120/150/180/200/250	87	3/8"	2,5
ASM-30	110-115	60	0,74	0,075	0,10	3450	125	85/120/150/180/200/250	87	3/8"	2,5
ASM-60	220-240	50	0,34	0,075	0,10	2800	125	85/120/150/180/200/250	87	1/2"	2,5
ASM-60	230	60	0,34	0,075	0,10	3350	125	85/120/150/180/200/250	87	1/2"	2,5