


CLT





AVAILABLE FIXING PLATES



TECHNICAL SPECIFICATIONS



Category	AGITATOR-PUMP with immersed vertical axis.
Windings	Single-phase motor. Insulation Class F.
Motor body	Naked.
Protection	IP 00 ingress protection rating.
Safety	Built-in thermal motor protection system.
Ball bearings	Ø 6 mm bearings in a semi-rigid noise-damping silicone casing.
Motor shaft	AISI 303 INOX steel Ø 6 mm.
Fastening parts	INOX steel or corrosion-resistant materials.
Motor parts	N.A.
Cooling system	Air cooled pump with a suction speed of 1,2 m/s.
Water connection	Compatible with John Guest fittings.
Operation	Power supply 115 or 220-240 Volts - 24 hours a day non stop. Clean non drinkable water only.
Regulations	Check machine's requirements.
Note	Read the instruction booklet for correct set up and use. Designed for industrial use with CE certified cooler machinery only. Not intended for food contact.

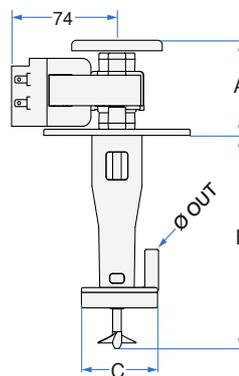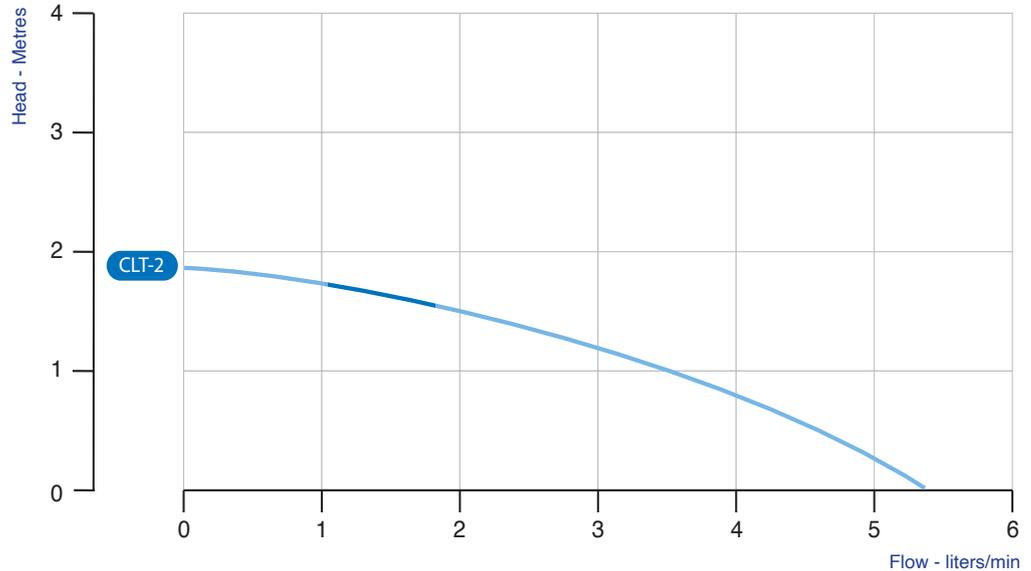

TYPE	Volt	Hz	Amp	Watt (IN)	RPM	A	B	C	Ø OUT	Propeller Ø [mm]	Weight [Kg]
CLT-2	220-240	50	0,20	26	2500	64	150	52	9,5	40x15° 2 Blades	1
CLT-2	220-240	50	0,21	27	2500	64	150	52	9,5	45x15° 2 Blades	1