

MD-30 agitator is a **good-value solution for compact installations**. It can be configured with **powerful propellers** granting an high agitation in the tank.





MD-30

TECHNICAL SPECIFICATIONS



Category	Classic AGITATOR.
Windings	Single-phase motor. Insulation Class F.
Motor body	Shaded poles motor.
Protection	IP 00 ingress protection rating.
Safety	Built-in thermal motor protection system.
Ball bearings	NSK and SKF (long-life) self-lubricant bearings or equivalent, in semi-rigid noise-damping housings.
Motor shaft	AISI 303 INOX steel.
Fastening parts	INOX steel or corrosion-resistant materials.
Motor parts	N.A.
Cooling system	Air cooled agitator with a suction speed of 3,1 m/s.
Operation	Power supply 220-240 Volts - 24 hours a day non stop. Clean non drinkable water only.
Regulations	Check machine's requirements.
Note	Secure the motor at a min. distance from the water of 20 mm. Read the instruction booklet for correct set up and use. Designed for industrial use with CE certified cooler machinery only. Not intended for food contact.

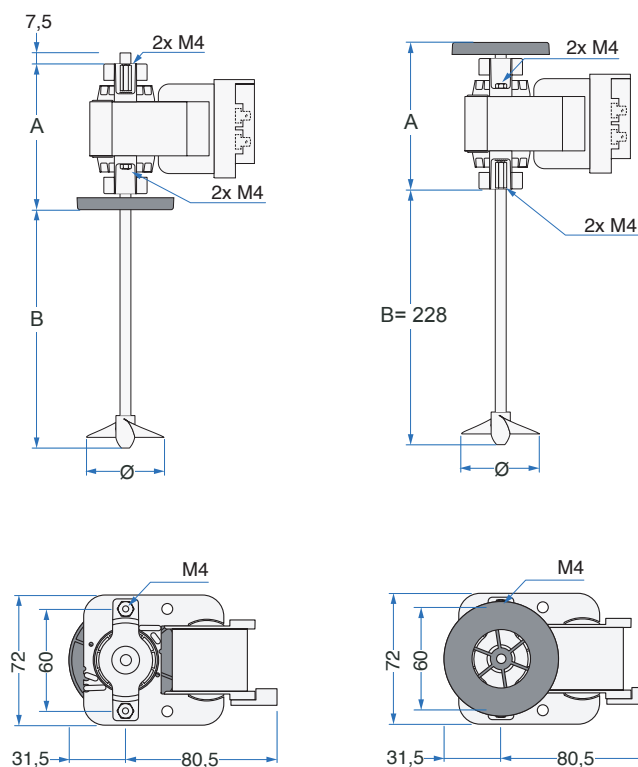

TYPE	Volt	Hz	Amp	Watt	RPM	A	B	Propeller Ø [mm]	Weight [Kg]
MD-30	230	50-60	0,55	45	2800-3400	80	147	50x15° 2 Blades	1,4
MD-30	230	50-60	0,48	50	2800-3400	80	153	62x15° 2 Blades	1,4
MD-30	230	50-60	0,55	45	2800-3400	80	214	50x15° 2 Blades	1,4
MD-30	230	50-60	0,48	50	2800-3400	80	220	62x15° 2 Blades	1,4
MD-30	115	60	0,95	50	3400	80	147	50x15° 2 Blades	1,4