

SK series, made with **UL compliant materials**, is a **long-life reliable solution** that supports you in reaching worldwide markets. Its **robust aluminum design** and the **wide range of configurations** available makes it the perfect choice when **great performance** are required.




SK-20/ 30




TECHNICAL SPECIFICATIONS

Category	Classic AGITATOR.
Windings	Single-phase motor. Insulation Class F.
Motor body	Extruded aluminium casing.
Protection	IP 44 ingress protection rating.
Safety	Built-in thermal motor protection system.
Ball bearings	NSK and SKF (long-life) self-lubricant bearings or equivalent, in semi-rigid noise-damping housings.
Motor shaft	AISI 303 INOX steel.
Fastening parts	INOX steel or corrosion-resistant materials.
Motor parts	Thermoplastic motor parts resistant to high temperature.
Cooling system	Air cooled agitator with a suction speed of 3,1 m/s.
Operation	Power supply 115 or 220 Volts - 24 hours a day non stop. Clean non drinkable water only.
Regulations	Complying with EN60335-2-41:2003/A2:2010 and WEEE/RoHs directives.
Note	Read the instruction booklet for correct set up and use. Designed for industrial use with CE certified cooler machinery only. Not intended for food contact.

STANDARD VERSION

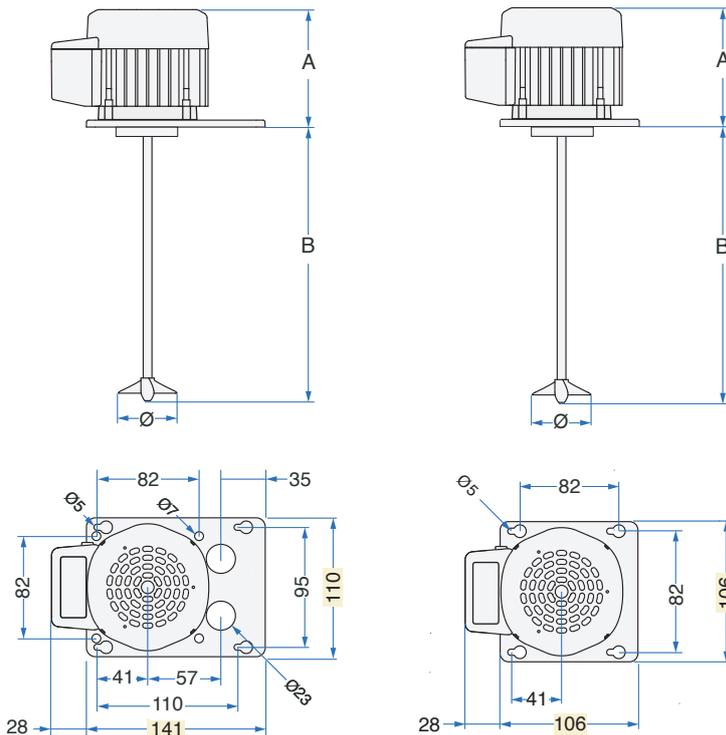

COMPACT VERSION SK-30

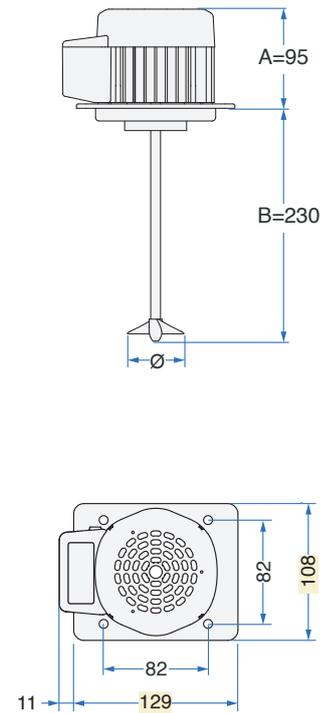

TYPE	Volt	Hz	Amp	Watt	RPM	A	B	Propeller Ø [mm]	Weight [Kg]
SK-20	115	60	0,40	41	3500	91	190/220	50x15° 2 Blades	1,3
SK-20	220	50-60	0,17	37	2850-3400	91	190/220	50x15° 2 Blades	1,3
SK-30	115	60	0,56	59	3500	105	236	66x15° 2 Blades	1,7
SK-30	220	60	0,25	59	3500	105	236	66x15° 2 Blades	1,7