
MID series offers an agitator pump solution that gives you the possibility to satisfy ***low budget requirements*** *and reach* ***worldwide markets****.*


SABER


MID

TECHNICAL SPECIFICATIONS





Category	AGITATOR-PUMP with immersed vertical axis.
Windings	Single-phase motor. Insulation Class F.
Motor body	PA66 30% glass fiber plastic shell motor housing.
Protection	IP 31 ingress protection rating.
Safety	Built-in thermal motor protection system.
Ball bearings	Ø 8 mm NSK, SKF or equivalent, in semi-rigid noise-damping silicone casing.
Motor shaft	AISI 303 INOX steel Ø 8 mm.
Fastening parts	INOX steel or corrosion-resistant materials.
Motor parts	Thermoplastic motor parts resistant to high temperature.
Cooling system	Air cooled pump with a suction speed of 1,6 m/s.
Water connection	Compatible with John Guest fittings.
Operation	Power supply 115 or 220-240 Volts - 24 hours a day non stop. Clean non drinkable water only.
Regulations	Complying with EN60335-2-41:2003/A2:2010 and WEEE/RoHs directives.
Note	**Italian PATENTED component**. Read the instruction booklet for correct set up and use. Designed for industrial use with CE certified cooler machinery only. Not intended for food contact.

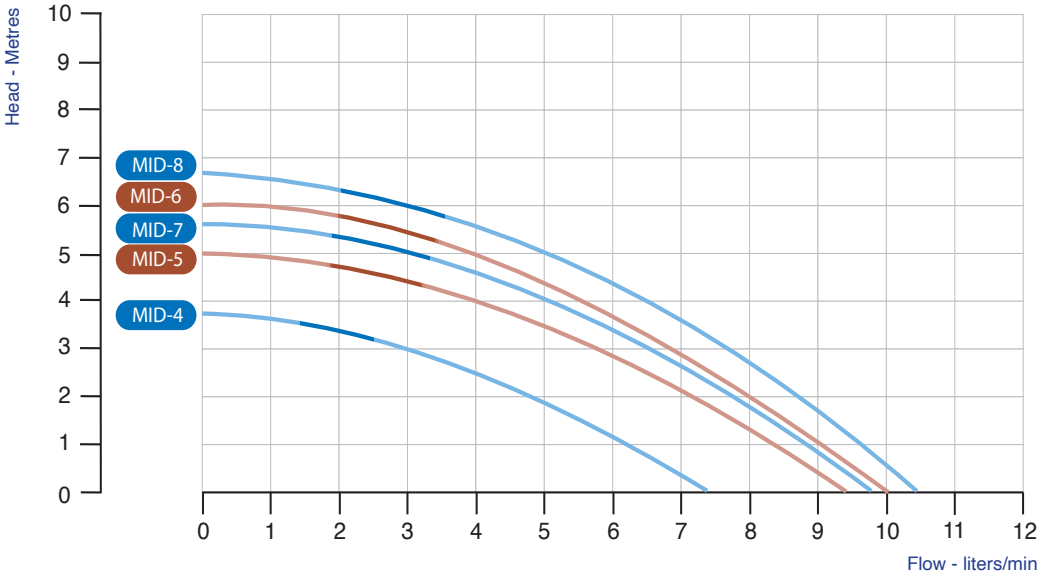


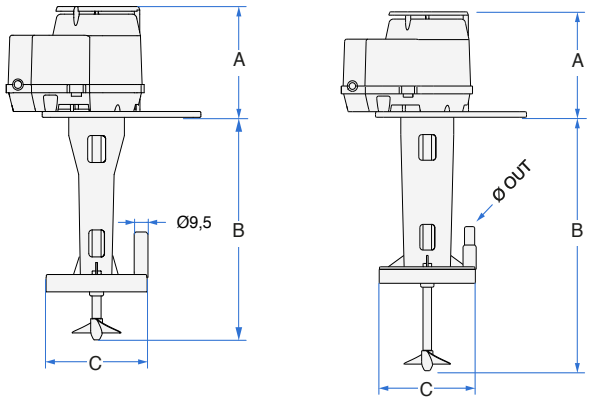

AVAILABLE FIXING PLATES

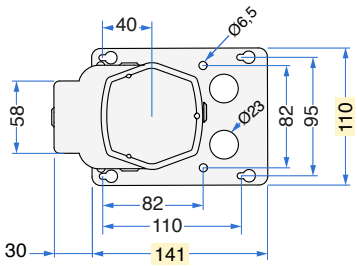





TYPE		Volt	Hz	Amp	Watt (IN)	RPM	A	B	C	Ø OUT	Propeller Ø [mm]		Weight [Kg]
MID-4	❄	*220-240*	*50*	*0,57*	*57*	*2800*	*96*	*153*	*64*	*9,5*	*50x15°*	*2 Blades*	*1,7*
MID-7	❄	*220-240*	*50*	*0,60*	*64*	*2750*	*96*	*187*	*78*	*9,5*	*50x15°*	*2 Blades*	*1,8*
MID-7c	❄	*220-240*	*50*	*0,60*	*64*	*2750*	*96*	*153*	*78*	*9,5*	*50x15°*	*2 Blades*	*1,7*
MID-8		*220-240*	*50*	*0,60*	*68*	*2700*	*96*	*220*	*90*	*9,5/12,3*	*50x15°*	*2 Blades*	*1,8*
MID-5		*115*	*60*	*1,25*	*66*	*3400*	*96*	*185*	*64*	*9,5*	*45x15°*	*2 Blades*	*1,7*
MID-6		*115*	*60*	*1,40*	*70*	*3400*	*96*	*185*	*78*	*9,5/12,3*	*45x15°*	*2 Blades*	*1,8*

Rev. 21-02 Performance and electrical data have been tested at 20°C with clean water only. The company reserves the right to modify specifications without prior notice.

© SABER SRL 2026 - ALL RIGHTS RESERVED - REGISTERED DESIGN - www.saberpumps.com